TILA BEADS® 2 HOLE

TILA Beads instruction Vol.2 Monotone Bracelet
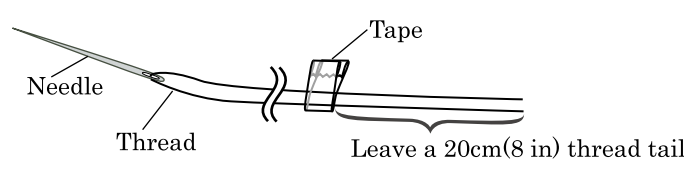

TILA BEADS® 2 HOLE
MIYUKI CO,LTD.

Finished size…About 17.5cm〜22cm (Including clasp)
〈(3 lines) 1.5cm(0.5 in.)×(31 rows) 15.3cm(6 in.)〉

Tools…Scissors・Ruler・Pliers・Round nose pliers・Tape
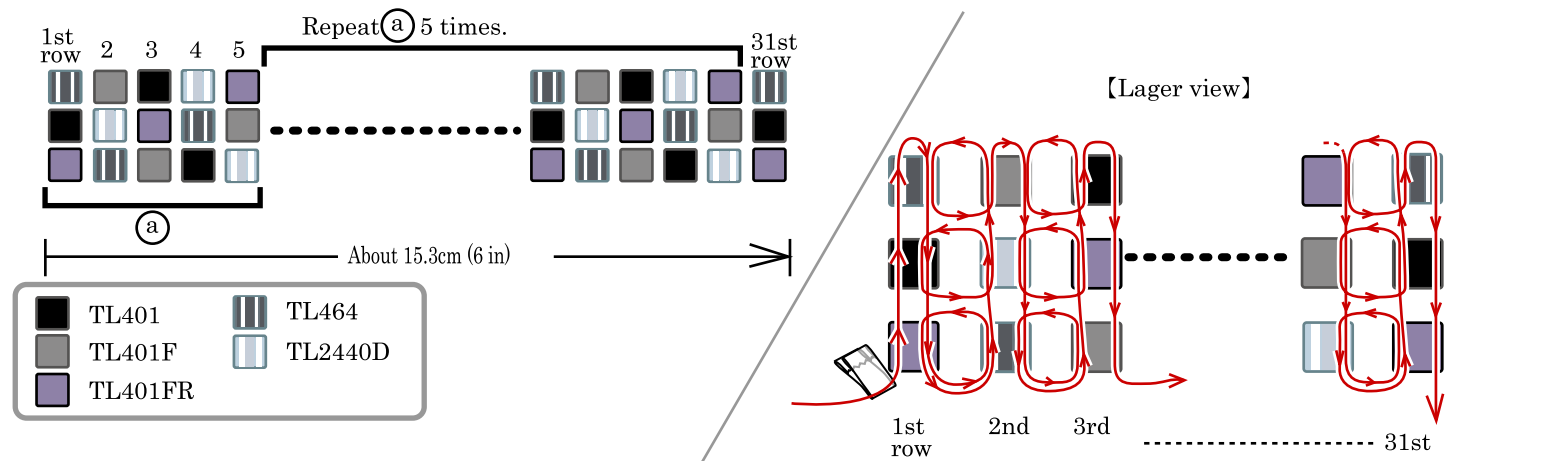
<POINT>
The wavy side is the upper side of TILA beads.
The flat side is the back side. When pass through
the beads, face up the upper side of TILA beads for
this project.

1) Cut a 2m(6.6 ft.) of nylon thread, then thread a needle with double thread.
Tape a thread, leaving a 20cm(8 in.) thread tail.
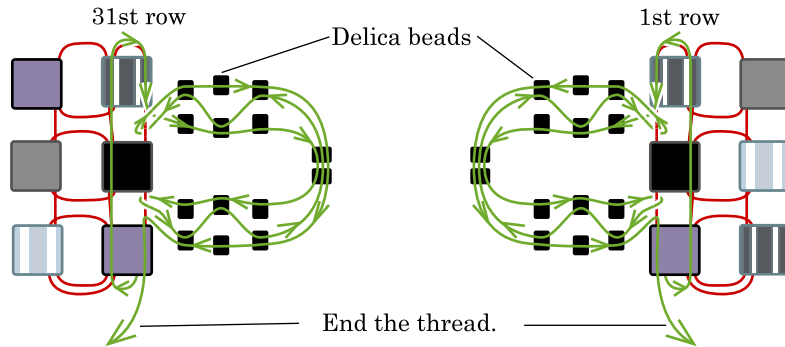

Needle
Thread
Tape
Leave a 20cm(8 in) thread tail.

2) Start string from left hole of the beads of 1st row, repeat square stitching until 31st row while using
2m (6.6ft) of nylon thread x 4 pcs. (You need total of 8m (26.3ft) but it is too long to string. Please add
new threads in each 2m (6.6ft) while stringing.).
When a thread tail becomes short after some rows are made, finish the thread (knot it and string it into
some bead holes). Add another thread and keep stringing. When you add new thread, do not string into
the same bead holes which already the old thread is strung to finish the thread tail.

1st row 2 3 4 5   Repeat ⓐ 5 times.   31st row

ⓐ

About 15.3cm (6 in)

■ TL401	▥ TL464	
▦ TL401F	▥ TL2440D	
▨ TL401FR		

【Lager view】

1st row   2nd   3rd   31st

※The thread in the picture is different from actual color for easier view.
Also, thread in the picture is single thread, but it's actually doubled thread.

1/2

TILA BEADS ® 2 HOLE

MIYUKI Co., Ltd.
mail:e-mail@miyuki-beads.co.jp
web:www.miyuki-beads.co.jp/english/
Note: Re-sell this instruction is prohibited

TILA Beads instruction Vol.2 Monotone Bracelet

3) When you reach the 31st row, make the loop with Delice beads. Remove the tape from thread tail at 1st row, then make another beaded loop using the thread tail. End a thread by passing back through the beadwork and tying several knots along the way. Cut off the excess thread end.

31st row   Delica beads   1st row

End the thread.

※The thread in the picture different from actual color for easier view.
　Also, thread in the picture is single thread, but it's actually doubled thread.

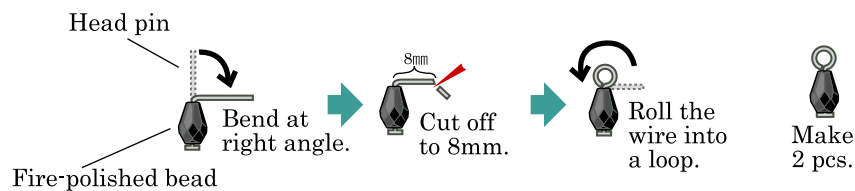4) String a fire-polished bead on the head pin, then bend the pin as in the picture.

Head pin

Bend at right angle.   8mm Cut off to 8mm.   Roll the wire into a loop.   Make 2 pcs.

Fire-polished bead

5) Remove the drop of the extender. Use oval jump rings to connect the clasp to the loops at 3).

Drop

31st row   Spring ring   1st row

Extender   Oval jump ring   Oval jump ring

2/2