



SYRA

Designed by Cora Sparidaans

Courtesy of Natascha Kralen
www.natschakralen.nl



Materials

for a 7inch bracelet, excluding the clasp:

10 Pieces Octo 8x4mm	OCT
9 Pieces GemDuo	GM
40 Pieces Paisley Duo 8x5mm	PD
3 Gram Miyuki Spacer 2.2	SP
20 Pieces Fire Polish Facet 2mm	F2
18 Pieces Swarovski 4mm Bicone	BIC4

You also need:

Fireline 8 lb
#12 beading needles
1 Strand Clasp
Scissors
2 open jump rings
Pliers

SKILL: Advanced beginner and up

TECHNIQUES: Odd-count peyote, modified circular peyote

Before You Begin:

- Always check that all holes of any multi-holed beads are clear before use.
- When text says to sew through beads multiple times, illustrations only show one pass for visual clarity.
- This project uses a lot of thread, you will need to stop and start a new thread as needed.
- This project does not use the center hole of the Octo beads.
- To make a shorter bracelet, decrease one Octo and one Paisley Duo segment.
- To make a longer bracelet, increase one Octo and one Paisley Duo segment.

www.nataschakralen.nl @CoraSparidaans
Design Cora Sparidaans info@nataschakralen.nl

Step 1

Cut and thread 2 yards of Fireline, place a stop bead leaving a six-inch tail. String *1xPD, 1xSP, 1xOCT (outer hole), 1xSP, 1xPD, 1xSP, 1xGD (top hole), 1xSP repeat *until you have the desired length, ending with a PD.



Step 2

String 7xSP, 1xPD, 1xSP, Sew through the open hole of the OCT.




Step 3

- String 1xSP, 1xPD and 1xSP and sew through the next GD.
- String 1xSP, 1xPD and 1xSP and sew through the next open hole of the OCT.
- Repeat step 3a and 3b across the row.



Step 4

Sew through the first PD added in step 1.

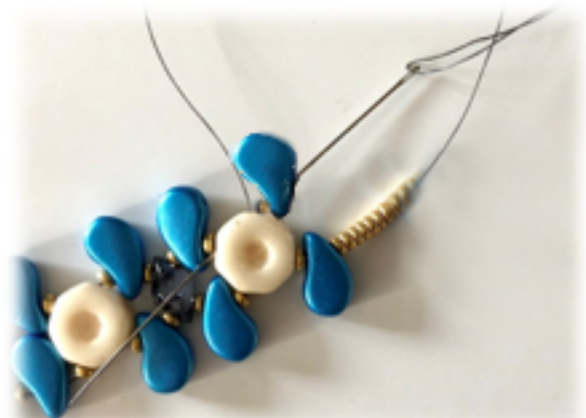

Step 5


- Sew through the outer hole of the OCT, reverse direction and sew through the second half the same OCT. Continue through the SP and PD.
- Sew through open hole of the same PD.



5

Step 6


String 1xSP, 1xF2 and 1xSP, sew through the next PD (outer hole).

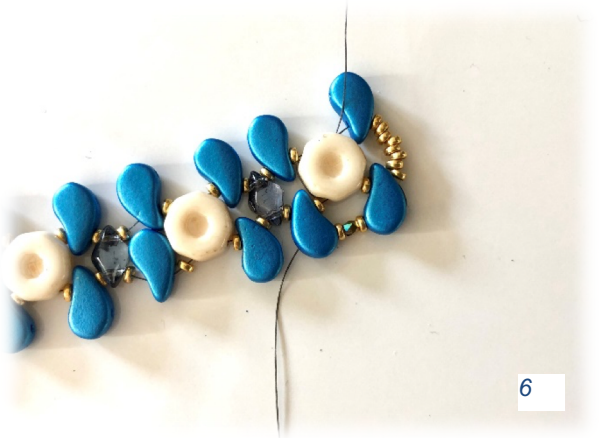

6

Step 7

String 1xBIC4 sew through the next PD (outer hole).

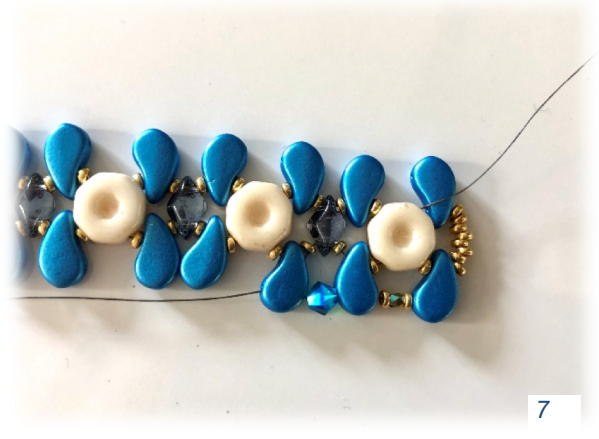

7

Step 8

- Sew through bottom hole of the PD, plus the SP and OCT. Reverse direction and sew through the outer hole of the same OCT, plus the SP and PD. Sew through the open hole of the PD.
- Repeat Step 6 and 7 across the row and exit the last PD.
- Repeat steps 6 and 7 across the row.
- Tie of all threads with several half-hitch knots around existing thread, and trim excess.

Step 9

With pliers, open a jump ring and attach the one half of the clasp on the outer loop made of SP. Close the jump ring. Repeat for other side of the bracelet.